

**PACKAGING EQUIPMENT** 

## Viking Automatic Shrink Tunnel



These inline Dip Tanks are designed to operate with both belt and swing lid model vacuum packers.

This concept allows for greater efficiency and through-put of product, while also guaranteeing a consistent result with the shrink packaging.

European design & quality




## Standard Technical Specifications

External Dimensions (L x W x H)	1050 x 1170 x 1500mm
Internal Dimensions (L x W x H)	800 x 600 x 418mm
Power	415V / 22kW / 58A / 5 Pin
Immersion Depth	250mm
Pneumatic Connection	6 bar
Water Connection	2"- Hot Water

Shrink effectively safeguards product freshness and quality, reduces purge and minimises wrinkles, folds and ears which is caused during the packaging process.

Shrink physically strengthens the oxygen barrier and abuse resistant properties of the shrink bag.

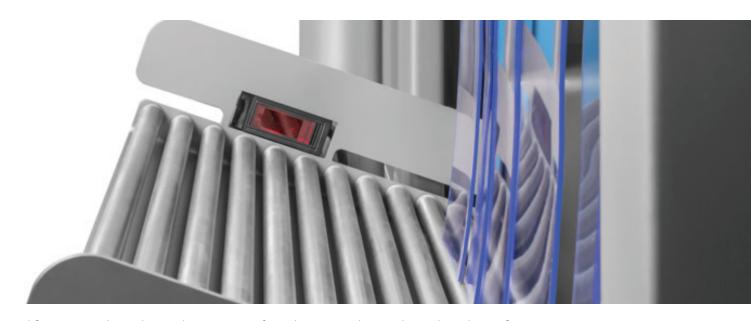

Modifications made to the machine at time of purchase may change the technical specifications.