



PACKAGING EQUIPMENT

Viking DT 66 Dip Tank



Dip Tanks complete the Shrink process by immersing a vacuumed package in hot water for 2 -4 seconds.



Standard Technical Specifications

Water Capacity	95L
Max Load on working plate	35kg
Power	415V / 20A
Chamber Dimensions (L x W x H)	500 x 600 x 240mm
Max. Dipping Depth	240mm
Machine Dimensions (L x W x H)	740 x 770 x 1055mm
Cycle Time	3 - 4sec
Power Consumption	9.0kW

Predetermined immersion time and water temperatures are carefully controlled by the machine.

This guarantees a consistent high quality of vacuum shrink packaging and ensures any liquids stay with the product to keep its fresh, natural look.

Shrink technology, once complete, protects your product perfectly just like a second skin.



Modifications made to the machine at time of purchase may change the technical specifications.




Features



Automatic temperature control



Manufactured in Holland

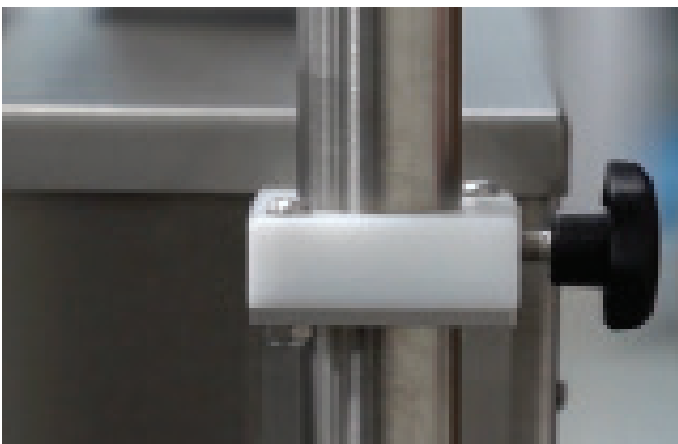

Height adjustment



Complete with insulation balls