



PACKAGING EQUIPMENT

Viking DT 99 Dip Tank



Dip Tanks complete the Shrink process by immersing a vacuumed package in hot water for 2 -4 seconds.



Standard Technical Specifications

Water Capacity	150L
Max Load on working plate	35kg
Power	415V 32A
Chamber Dimensions (L x W x H)	600 x 800 x 240mm
Max. Dipping Depth	240mm
Machine Dimensions (L x W x H)	950 x 875 x 1055mm
Cycle Time	3 - 4sec
Power Consumption	15.0kW

Shrink effectively safeguards product freshness and quality, reduces purge and minimises wrinkles, folds and ears which is caused during the packaging process.

Shrink physically strengthens the oxygen barrier and abuse resistant properties of the shrink bag.



Modifications made to the machine at time of purchase may change the technical specifications.




Features



Automatic temperature control



Manufactured in Holland

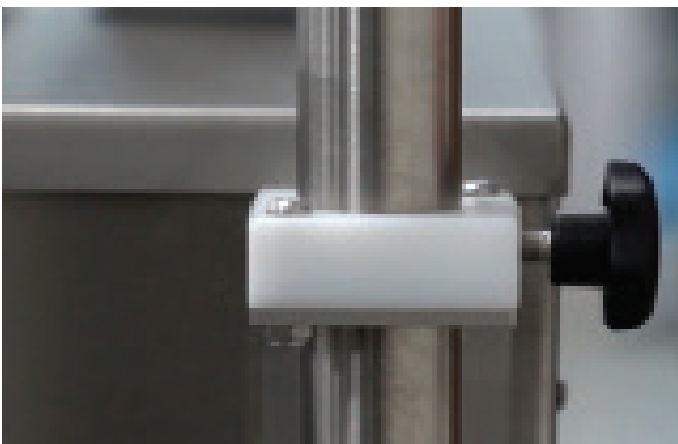

Height adjustment



Complete with insulation balls